


1. Introduction

RF current probes can be embedded into EMCview, using a suitable correction / conversion file. This application note elaborates the simple mathematical procedure to convert RF current probe characteristics, typically specified as transfer impedance in dB Ω or transducer factor in db(1/ Ω) into a suitable correction file for EMCview.

RF current probe noise measurement specification in dB μ A

Following example curve shows conducted noise limits for measurements with RF current probes. The limits are given in dB μ A.

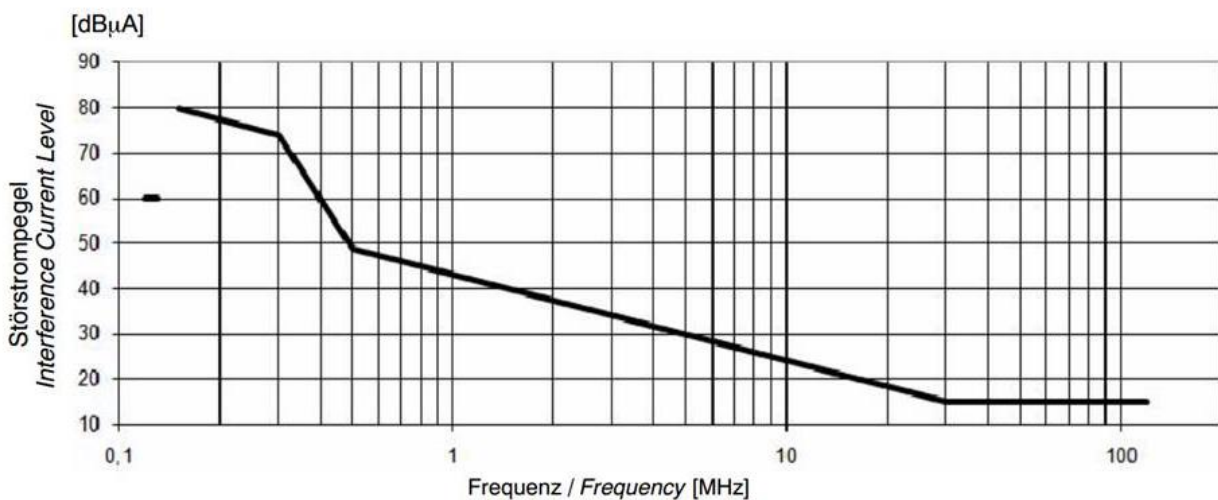

The limits are given in dB μ A, whereas EMCview software extracts measurement values from spectrum analyzers in dB μ V. Thus we need to convert from dB μ V into dB μ A.

Using Ohm's law: $I=U/R$

Applying logarithm to both sides of the equation: $\log(I) = \log(U/R)$

...subsequently application of logarithmic laws :

$$\log(I) = \log(U/R) = \log(U) - \log(R)$$

convert Ω into dB(Ω): $\text{dB}(\Omega) = 20\log(Z)$

we obtain Ohm's in dB-format:


$$\text{dB}\mu\text{A} = \text{dB}\mu\text{V} - 20\log(Z)$$

extract dB μ V:

$$\text{dB}\mu\text{V} = \text{dB}\mu\text{A} + 20\log(Z)$$

Using RF current probes with EMCview

If we take a look at the RF current clamps of R&S, model EZ-17, we see that we don't even need to convert into dB(Ω). We can extract the transducer factor, means the reciprocal value of the transfer impedance directly from the curve:

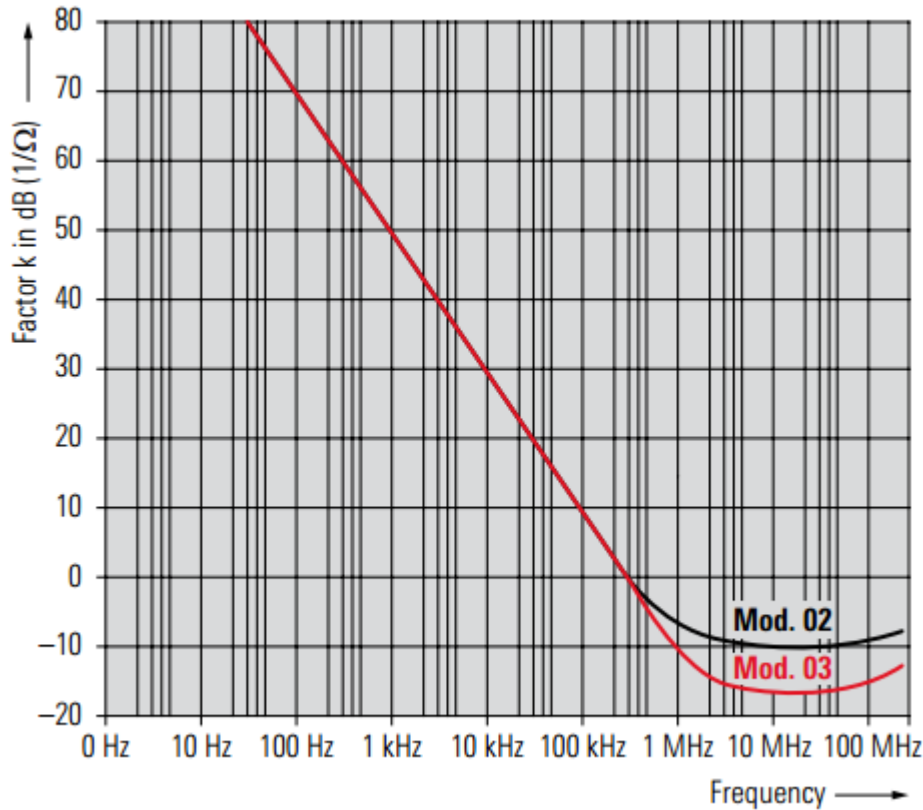

Transducer factor of the R&S EZ-17 models

Transfer impedance Z_T		
In range with constant transducer factor	3.16 Ω	7.1 Ω
Transducer factor $k^{1)}$ in range with flat frequency response	-10 dB ($1/\Omega$)	-17 dB ($1/\Omega$)

¹⁾ The manual contains a table specifying the transducer factor from 20 Hz to 200 MHz.

The transducer factor k is calculated as $k = 20 \log(1/Z_T)$, where Z_T is the transfer impedance.

According to logarithmic laws $\log(1/z) = -\log(z)$, means we take the values from the curve and enter it into the LISN correction file with inverted sign.

Correction coefficients for model 02

Frequency	Correction coefficient [dB]
30Hz	-80dB
100Hz	-70dB
1kHz	-50dB
10kHz	-30dB
100kHz	-10dB
1MHz	6dB
10MHz	10dB
100MHz	9dB


Using RF current probes with EMCview



Correction coefficients for model 03

Frequency	Correction coefficient [dB]
30Hz	-80dB
100Hz	-70dB
1kHz	-50dB
10kHz	-30dB
100kHz	-10dB
1MHz	10dB
10MHz	16dB
100MHz	15dB

In the case of a Fisher current probe, the transfer impedance is also already specified as logarithmic values:

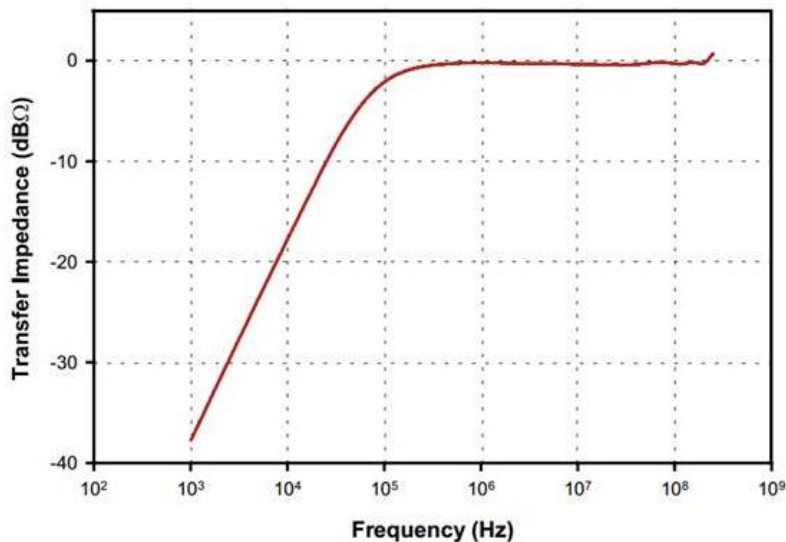

Specifications

Frequency:	1 kHz – 250 MHz
Internal diameter:	32 mm
External diameter:	71 mm
Height:	19 mm
$Z_t \Omega^1$:	1
$dB \Omega^1$:	0
Connector:	Type-N
DC to 400 Hz:	100 amperes
RF(CW):	2 amperes
Peak Pulse Current ² :	50 amperes

1: Probe calibrated with $50 \Omega + j0 \Omega$ Load Impedance.
2: Depends upon the pulse width and pulse rep. rate.

Assuming that we use the above Fisher Probe and assuming that the spectrum analyzer measures a value of $40 \text{ dB} \mu\text{V}$ at 1MHz:

From the Fisher data sheet we extract a transfer impedance of approximately $-38 \text{ dB}(\text{Ohm})$ at 1kHz
Under application of $\text{dB} \mu\text{A} = \text{dB} \mu\text{V} - 20 \log(Z)$:

→ $40 \text{ dB} \mu\text{V} - (-38 \text{ dB} \text{ Ohm}) = 78 \text{ dB} \mu\text{A}$ which means that the measured value of $40 \text{ dB} \mu\text{V}$ corresponds with a current of $78 \text{ dB} \mu\text{A}$

Assuming that we measure $25 \text{ dB} \mu\text{V}$ at 1MHz, we derive a transfer impedance of $0 \text{ dB}(\text{Ohm})$ from the curve.

→ $25 \text{ dB} \mu\text{V} - 0 \text{ dB} \text{ Ohm} = 25 \text{ dB} \mu\text{A}$

Using EMCview software we would take a „LISN“ file and simply enter the values of the transfer impedance curve:

Frequency	Correction coefficient [dB]
1kHz	-38dB
10kHz	-18dB
100kHz	-3dB

Using RF current probes with EMCview



1MHz	0dB
10MHz	0dB
100MHz	0dB

The values shown by EMCview can then be considered being dB μ A.

Version	Date	Author	Changes
V 1.0	20.04.2017	Mayerhofer	Creation of the document