


F - 170501-1008-1

BULK CURRENT INJECTION

The F-170501-1008-1 can inject very large RF currents into signal or power circuits up to 40 mm in diameter. The useable frequency range is from 10 MHz – 400 MHz with a typical insertion loss of less than 7 dB from 10 MHz – 400 MHz. The input power rating is 2.5 kW for 30 minutes.

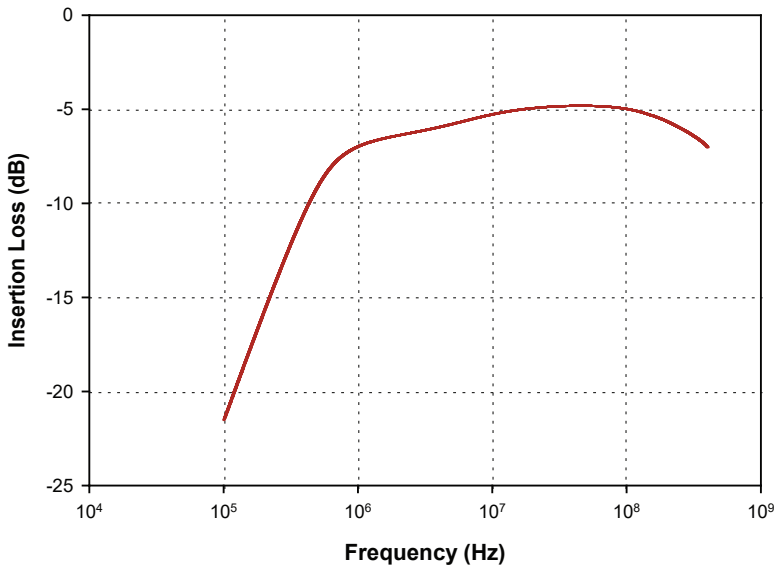

Specifications

Frequency: 10 MHz – 400 MHz
Inner Diameter: 40 mm
Outer Diameter: 127 mm
Height: 134 mm
Input Power rating: 2.5 kW (30 minutes)

Accessories

F-170421-1008-1 • Calibration Fixture
Bandwidth: 10 kHz – 400 MHz
F-52 • Current Probe
Bandwidth: 10 kHz – 400 MHz



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300

Email: sales@fischercc.com

© Fischer Custom Communications, Inc.