

SFT 1400

Burst Generator

IEC / EN 61000-4-4

- Burst frequency up to 125 kHz
- Single pulse to continuous burst
- Simple operation



Time-accurate triggering !
With a variety of special functions!

Overview

The SFT 1400 simulates fast transient interference pulses as defined in the standards IEC 61000-4-4 and DIN EN 61000-4-4. Due to the very short rise time of 5 ns, the individual impulses generate a broadband RF spectrum up to 300 MHz. RF interference is the result.

The clearly arranged operating elements allow time-saving and optimized tests. The memory function stores the normative test levels 1, 2, 3 and 4. In addition, own test sequences can be stored.

Special functions: The generator also offers various special functions such as "**Real Burst**", which simulates the natural appearance of the burst pulse, or "**Noise**". The functions "**IFM**" and "**DFM**" (increasing or decreasing frequency within a burst packet) are important tools for investigating resonance or saturation effects in the EUT.

Key facts

- Clearly arranged control elements allow time-saving and optimized tests
- All parameters can be changed during the test
- With the memory function, the normative test levels 1, 2, 3 and 4 are stored
- Additionally, own test sequences can be stored
- Special functions, like real burst or noise
- With high voltage output, connection for coupling pliers or 3-phase coupling network
- Extensive range of accessories available



SFT 1400

Burst Generator

Technical data

Burst Generator	
Burst frequency	Single pulse up to 125 kHz
Pulse voltage	100 V - 5000 V
Polarity burst packet	pos., neg., alternating
Pulse shape	acc. to IEC 61000-4-4
Max. pulses / sec	5000 (up to 2 kV) 3000 (up to 3 kV) 1500 (up to 5 kV)
Max. pulse / packet	500
Interface	RS 232
Operating temperature	0 - 40 °C
Dimensions	19" housing (3 RU)
Weight	9 kg
Supply voltage	100-240 V / 47-63 Hz

Internal single-phase coupling network

Nominal voltage AC	max. 230 V / 16 A, 50 Hz
Nominal voltage DC	max. 110 V / 8 A
Phase display	LED red LED green
Coupling capacity	33 nF
Coupling switch	L, N, PE -> E L, N -> E; etc.
Test sample connection	Schuko socket additional laboratory sockets
High voltage output	FISCHER HV-socket

Technical data - Burstdefinition

	Normdefinition	Variable settings on the SFT 1400
Burst duration	15 ms 20 % at 5 kHz 0,75 ms 20 % at 100 kHz (corresponds to 75 pulses each)	0,01 - 100 ms ⁽¹⁾
Burst period	300 ms ± 20 %	10 – 1000 ms ⁽¹⁾
Burst frequency	5 kHz or 100 kHz to 4 kV	100 Hz - 125 kHz to 5 kV
Pulse amplitude	0,5 / 1 / 2 / 4 kV	100 V - 5000 V (in 10 V steps)
Rise time	5 ns ± 30 %	
Pulse duration (50 Ohm)	50 ns ± 30 % 50 ns, -15 ns/+100 ns	
Pulse duration (1 kOhm)	50 Ω ± 2 %	


1) The SFT 1400 automatically considers the limit parameters.



SFT 1400

Burst Generator

Technische Daten: Funktionen im Überblick

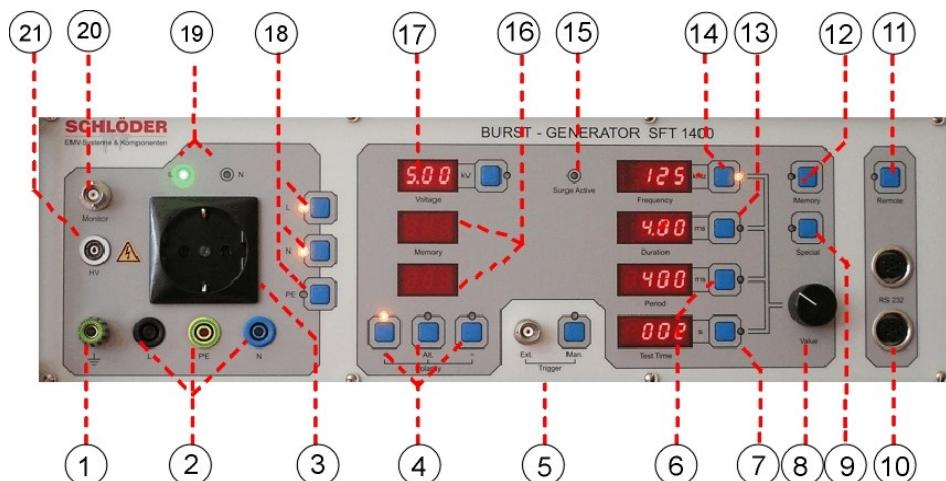

- | | | | |
|------|---|------|---|
| [1] | Earth connection | [14] | Auswahlstaste für die Burstdrehzahl. |
| [2] | Laboratory jacks for EUT connection. | [15] | Indikator für „Surge active“. |
| [3] | Protected earth outlet for EUT connection. | [16] | Anzeigen für die Memory-Funktion. |
| [4] | Polarity of the burst packet. | [17] | Anzeige für die Pulsspannung. |
| [5] | Trigger release key, external trigger input.
Time accurate triggering with jitter < ± 25 ns. | [18] | Auswahlstasten für die Koppelpfade. |
| [6] | Selection key for the period-time. | [19] | Phasenanzeigen. |
| [7] | Selection key for the test-time. | [20] | Monitoring (TTL Ausgang). |
| [8] | Digital potentiometer. | [21] | Hochspannungsaußengang (Anschluss für
Koppelzange oder 3-Phasen-Koppelnetzwerk.) |
| [9] | Selection of the special functions. | | |
| [10] | Jack for interface cable. | | |
| [11] | Remote control release. | | |
| [12] | Activation of the memory function. | | |
| [13] | Selection key for the duration-time. | | |



SFT 1400

Burst Generator

Options	
CWG 520	3-ph. coupling network 4 x 16 A, burst and surge
CWG 523	3-ph. coupling network 4 x 32 A, burst and surge
CWG 524	3-ph. coupling network 4 x 60 A, burst and surge
CWG 524-B	3-ph. coupling network 4 x 60 A, burst
SFT 470	probe set for magnetic field
SFT 415	coupling clamp
SFT 415-1	capacitive coupling clamp with hood
SFT 430	HV cable for coupling clamp 1 m
SFT 415-CS	calibration set coupling clamp
SFT 450-1	50 Ω attenuator, divider 500:1
SFT 450-2	1000 Ω attenuator, divider 1000:1
SFT 450-Set	50 + 1000 Ω attenuators, necessary for independent verification of the burst impulse at the generator or coupling clamp SFT 415
ZUB LWL OPTO	optical interface with 10 m LWL
EMV-SOFT	control software for burst etc.

All information regarding appearance and technical data correspond to the current state of development at the time of release of this data sheet. We reserve the right to make technical changes.

262101

