


BULK CURRENT INJECTION

The F-120-5 has been designed to extend the use of conducted immunity testing over the bandwidth of 10 kHz – 100 MHz. The F-120-5 is a high efficiency Injection Probe used primarily for low frequency conducted susceptibility testing.



F - 120-5

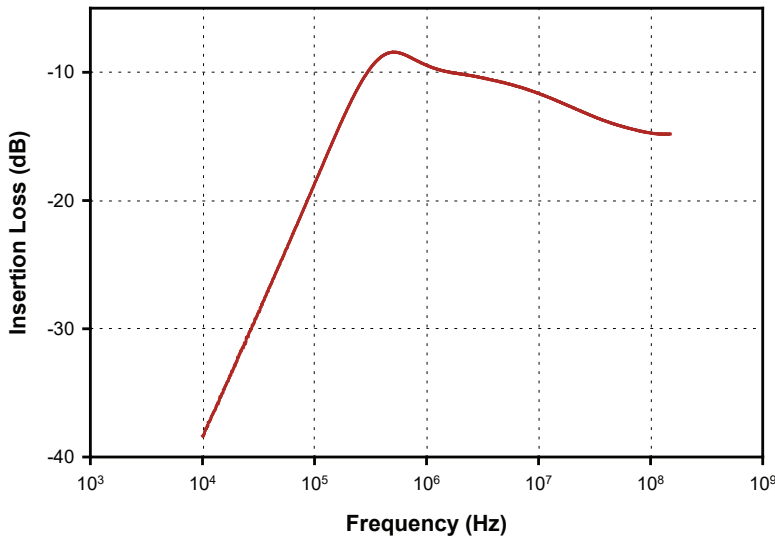

Specifications

Frequency: 10 kHz – 100 MHz
Inner diameter: 65 mm
Outer diameter: 142 mm
Height: 54 mm
Input Power rating: 100 watts (30 minutes)

Accessories

FCC-BCICF-3 • Calibration Fixture
Bandwidth: 10 kHz – 400 MHz
F-71 • Current Probe
Bandwidth: 10 kHz – 400 MHz

FCC

Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300

Email: sales@fischercc.com

© Fischer Custom Communications, Inc.