
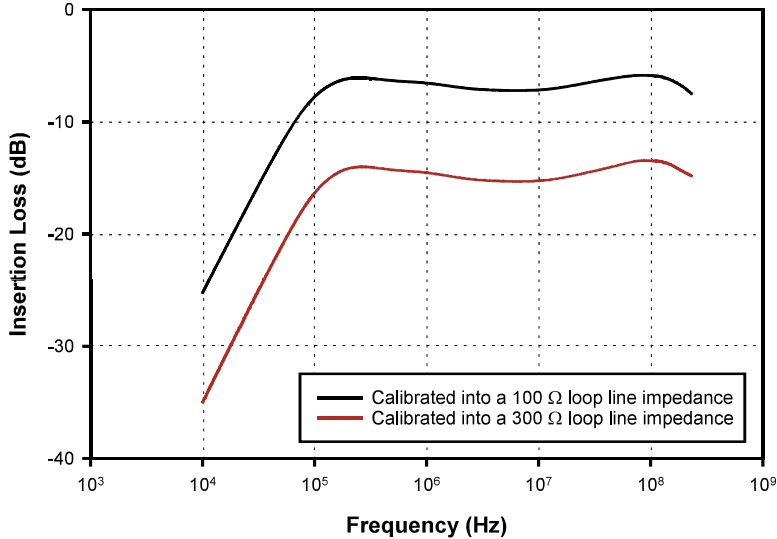


F - 120-9A

BULK CURRENT INJECTION

The F-120-9A has been designed to extend the use of conducted immunity testing over the bandwidth of 10 kHz – 230 MHz. The useable frequency range is 10 kHz - 230 MHz with an insertion loss of less than 8 dB between 150 kHz – 200 MHz. The input power rating is 100 watts for 30 minutes.

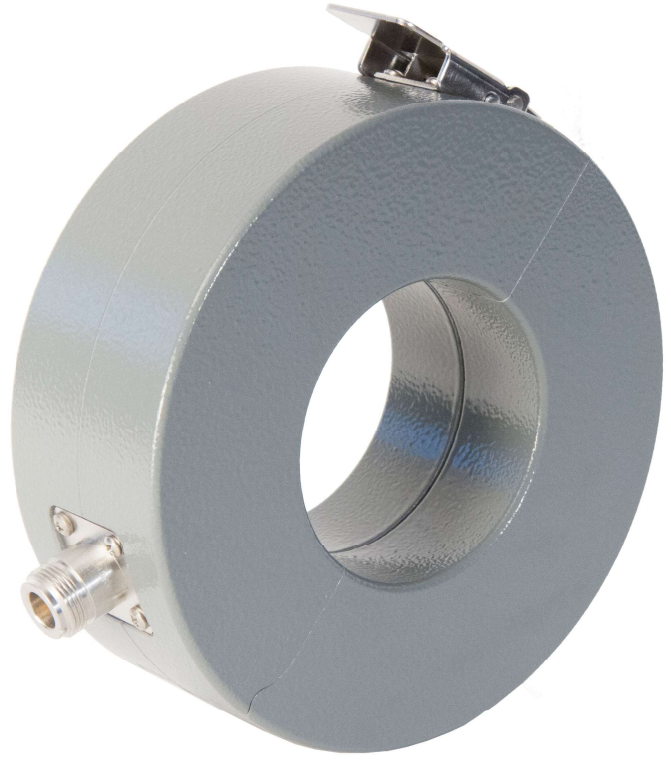

Specifications

- Frequency: 10 kHz – 230 MHz
- Inner diameter: 40 mm
- Outer diameter: 127 mm
- Height: 134 mm
- Input Power rating: 100 watts

Accessories

- FCC-BCICF-6-150 • Calibration Fixture
Bandwidth: 150 kHz – 230 MHz
- F-52B • Current Probe
Bandwidth: 10 kHz – 400 MHz



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300
Email: sales@fischercc.com