


CURRENT PROBE

The F-170302-1005-1 is used to measure pulse currents.

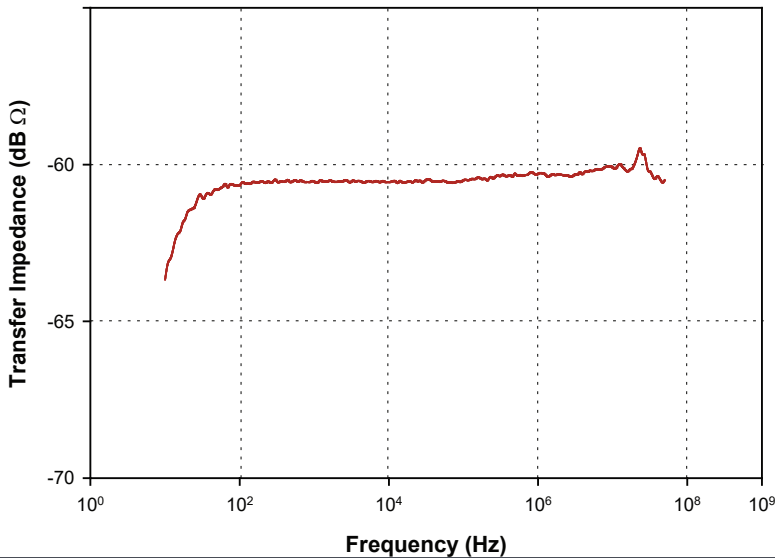

Specifications

Frequency:	10 Hz – 50 MHz
Internal diameter:	40 mm
External diameter:	80 mm
Height:	19 mm
$Z_t \Omega^1$:	0.001
$\text{dB}\Omega^1$:	-60
Connector:	Type-N
DC to 400 Hz:	20 amperes
RF(CW):	2 amperes
Peak Pulse Current:	
8 x 20 μs :	2000 amperes
6 x 100 μs :	1000 amperes
10 x 700 μs :	200 amperes

1: Probe calibrated with 50 Ω + j0 Ω Load Impedance.

F - 170302-1005-1

FCC

Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300

Email: sales@fischercc.com

© Fischer Custom Communications, Inc.