
shielde<u>x</u>



Shieldex® RF Enclosure Person Tent

RF-X PBN2

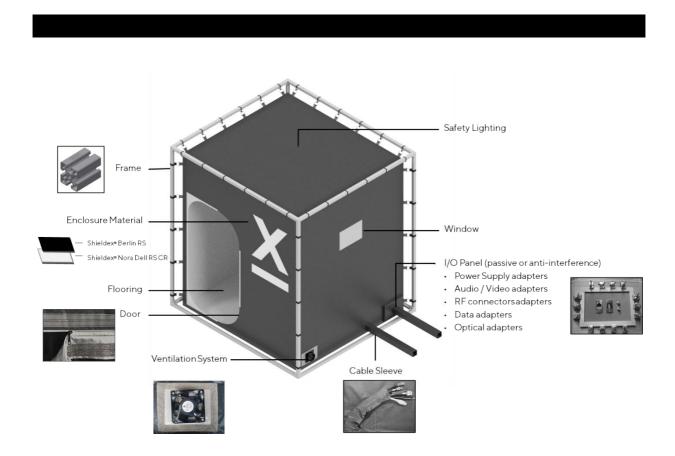

shielde<u>x</u>



Shieldex® RF Enclosure Person Tent

RF-X PBN2

Series P-Series

Outer size of the frame $2390 \times 2390 \times 2300 \text{ mm (LxWxH)}$

Inner size of the enclsoure $2150 \times 2150 \times 2180 \text{ mm (LxWxH)}$

Material Construction

Double Layer Shieldex® Nora Dell RS CR

Shieldex® Berlin RS

Clean Room compatible to A300 (Class 1000)

Shielding Effectiveness Average 85 dB in a frequency range of 0.3 GHz – 18 GHz

Included Cable Sleeve, Door, Aluminum Frame, Repair Kit, Installation Manual

Optional I/O Panel, Ventilation System, Window, Floor, Safety Lighting,

Transportation Box

Storage and Handling According to our care and handling instructions

Compliance and Certification DIN EN ISO 9001:2015, REACH, RoHS

Alterations Reserved 17.09.21/01 — The above information has been compiled from our manufacturer area according to the latest state of development and application technology. Since application and further processing are beyond our control, no liability of the producer can be derived from the contents of the data sheet. All deviant or transcending data sheet information must be confirmed in written form by the manufacturer. Our general terms and conditions apply in all cases. All previous data sheets are invalid with the publication of this data sheet. Please note our handling and storage instructions as well accessible at www.shieldex.de.

