P-04 Log-periodic antenna 200 MHz to 6 GHz **Main Features** 200 MHz to 6 GHz frequency range Excellent antenna factor Tripod adapter for easy vertical-horizontal polarization change Individual calibration Robust, rustproof aluminium construction Lightweight

LP-04 is a log-periodic antenna designed for radiated emissions and immunity testing that can be used in conjunction with any receiver or spectrum analyzer.

Its ideal companion is the EMI Receiver Unit 9060, which can be easily mounted on the antenna mast.*

*The direct connection between antenna and PMM receiver eliminates additional sources of uncertainties due to coaxial cable attenuation and scattering. For further information please consult our brochure "Fully CISPR-Compliant Digital EMC/EMI receivers 10 Hz to 18 GHz".



Log-periodic antenna 200 MHz to 6 GHz

SPECIFICATIONS

Frequency range	200 MHz to 6 GHz	
Impedance	50 Ω nominal	
Gain	6 dBi typical	
Antenna factor	12 to 40 dB/m typical	
	1011	

VSWR	< 1,8:1 typical
------	-----------------


Construction	Aluminium
	\


Max input power	100 W
Connector	N female

Dimensions (L x H x W) 780 x 100 x 750 mm

Weight	1,1 kg


RAL 7035 Colour

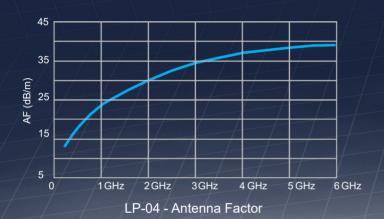



LP-04 Log-periodic Antenna with individual calibration report LP-04/TC Log-periodic Antenna with typical calibration report Includes: user's manual, soft carrying case, calibration report

LP-04 and tripod

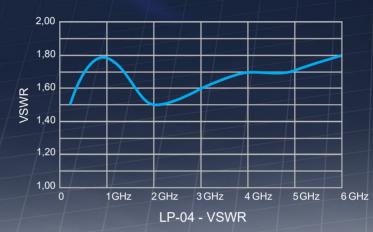

TR-01 set Includes:

TR01 60-180 cm wooden column extendable tripod, antenna mounting adapter to change polarization, soft carrying case, 5 meter / 6 GHz / N(m)-N(m) RF cable, Antenna Mounting kit AMK-01

Related products and services

Receivers

- 7010/01: EMI Receiver 9 kHz to 1 GHz
- 7010/03: EMI Receiver 9 kHz to 3 GHz 9010F: EMI Receiver 10 Hz to 30 MHz
- 9010/03P: EMI Receiver 10 Hz to 300 MHz
- 9010/30P: EMI Receiver 10 Hz to 3 GHz
- 9010/60P: EMI Receiver 10 Hz to 6 GHz
- 9030: EMI Receiver 30 MHz to 3 GHz
- 9060: EMI Receiver 30 MHz to 6 GHz
- FR4003: Field Receiver 9 kHz to 30 MHz

- BC-01: Biconical Antenna 30 to 200 MHz
- BL-01: Biconical Log Periodic Antenna 30 MHz to 6 GHz
- DR-01: Double-ridged Horn Antenna 6 to 18 GHz
- LP-02: Log Periodic Antenna 200 MHz to 3 GHz LP-03: Log Periodic Antenna 800 MHz to 6 GHz
- TR-01: Antenna Tripod
- VDH-01: Van der Hoofden Test Head 20 kHz to 10 MHz
- Antenna Set AS-02 (BC01+LP02+TR01)
- Antenna Set AS-03 (BC01+LP02+LP03+TR01)
- Antenna Set AS-04 (BC01+LP04+TR01)
- Antenna Set AS-05 (BC01+LP04+DR01+TR01)
- Antenna Set AS-06 (BC01+LP-02+LP03+DR01+TR01)
- Antenna Set AS-07 (BL01+TR01)
- Antenna Set AS-08 (BL01+DR01+TR01)
- RA-01: Rod Antenna 9 kHz to 30 MHz
- RA-01-HV: Rod Antenna 150 kHz to 30 MHz
- RA-01-MIL: Rod Antenna 9 kHz to 30 MHz

Calibration services

- · Ansi 63,5 Antenna Factor SAE ARP 958-D
- · Free-Space Antenna Factor

