



3GHZ / 10W N RF ATTENUATOR SET



Frankrijklaan 7, ITC Boskoop
2391 PX HAZERSWOUE DORP
The Netherlands
tel: +31 172 423 000
fax: +31 172 423 009
info@electrometric.com
www.electrometric.com

The TBAS3 RF attenuator set consists of 3dB, 6dB, 10dB and 20dB 3 GHz/10W N-attenuators in a beech wood box.



1 Specification

Frequency range: DC - 3GHz

VSWR; 3, 6, 10, 20 dB: < 1.3

Tolerance; 3, 6, 10, 20 dB: < +/- 0.5 dB

Power rating: 10W @ -55 to 40°C; up to 70°C with 50% power de-rating



Connectors: N-male / N-female; bidirectional

Dimensions: 150mm x 95mm x 45mm



Weight: 505g

3GHZ / 10W N RF ATTENUATOR SET

2 Measurement Plots

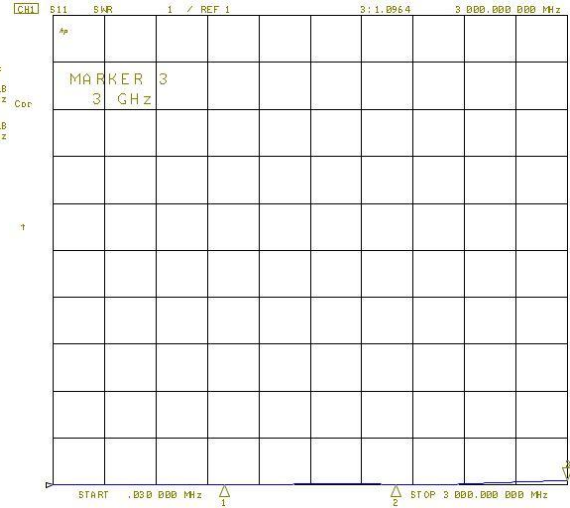
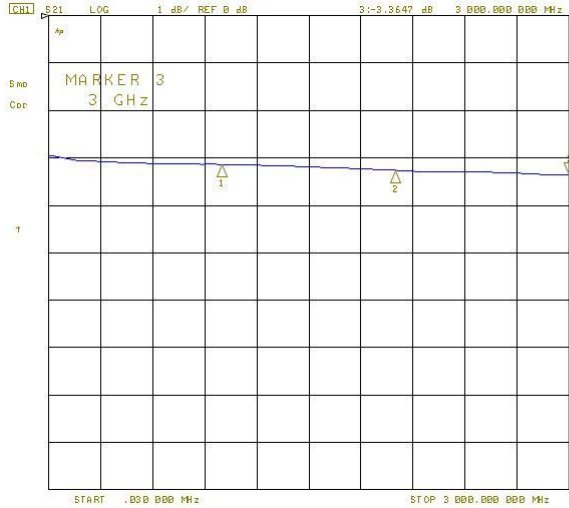


3dB Attenuator, S21 / VSWR

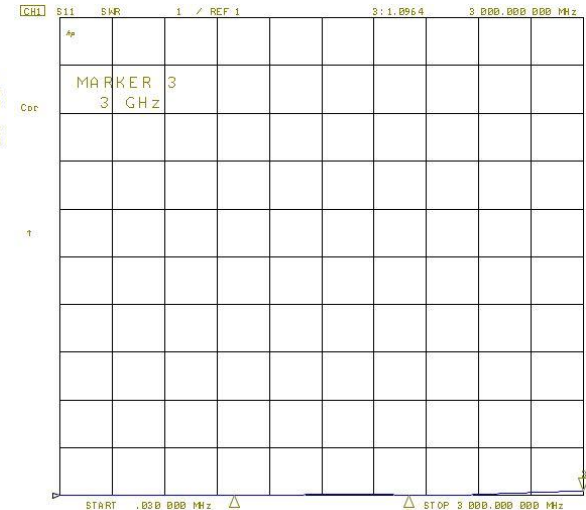
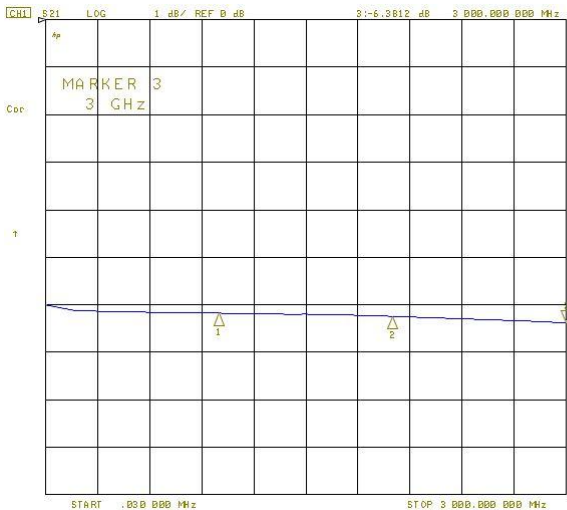


6dB Attenuator, S21 / VSWR

3GHZ / 10W N RF ATTENUATOR SET

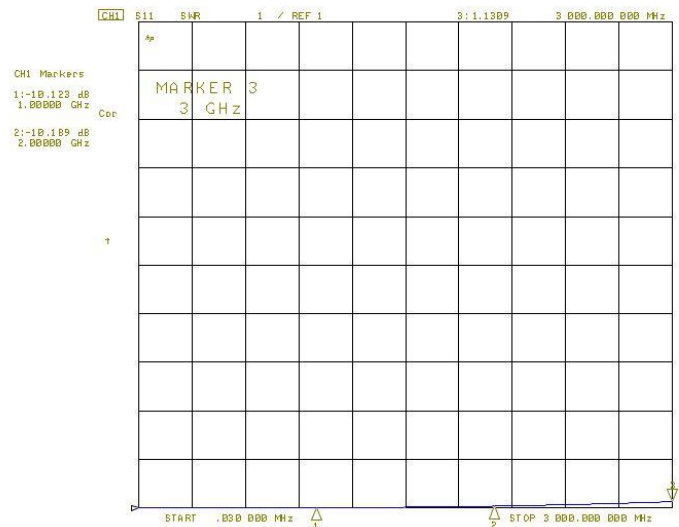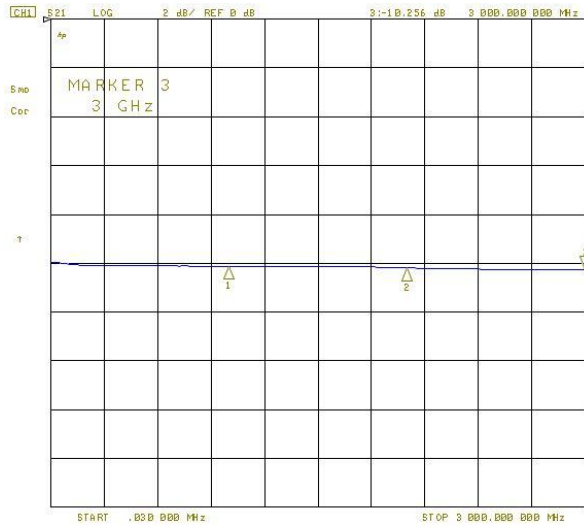

10dB Attenuator, S21 / VSWR

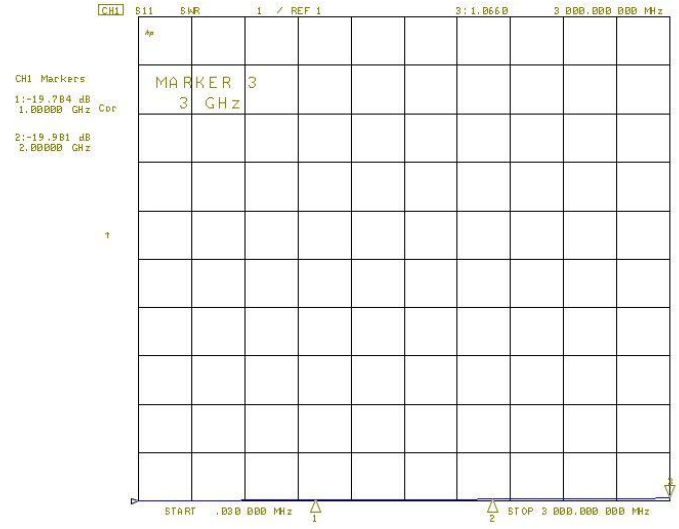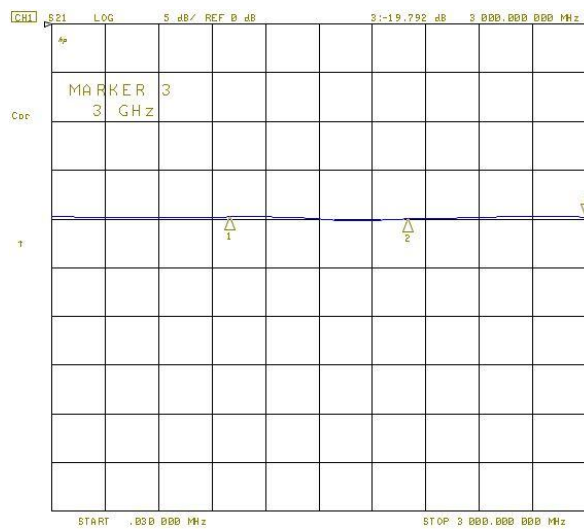

20dB Attenuator, S21 / VSWR

3 Ordering Information

Part Number	Description
TBAS3	Attenuator set 3dB, 6dB, 10dB, 20dB, 3GHz, 10W, N

TekBox Digital Solutions Vietnam Pte. Ltd.

www.tekbox.com

Factory 4, F4, Lot I-3B-1, Saigon Hi-Tech Park, Tan Phu Ward, District 9, Ho Chi Minh City, Vietnam



Frankrijklaan 7, ITC Boskoop
2391 PX HAZERSWOUDE DORP
The Netherlands
tel: +31 172 423 000
fax: +31 172 423 009
info@electrometric.com
www.electrometric.com